



Digital product and function overview to scan.

## PRODUCT DATA SHEET

### Product view




### Product information

Product group	Standard Coupling Type 2A
Item number	<b>CRA16151</b>
EAN / GTIN	4260182341513
Product name	Standard Coupling Type 2A CTC 165

### Product description

External flexible standard coupling designed to connect two vitrified clay pipes with the same dimensions (DN) as well as same materials and surface textures; shear band ensures joint integrity and pipe alignment under load; outside diameter differences with more than 12 mm have to be compensated with Crassus Bushes; in accordance with DIN EN 295-4; with acoustic decoupling; suitable for horizontal or vertical installation; suitable for flush-mounting and soil; UV-resistant material

### Technical drawing

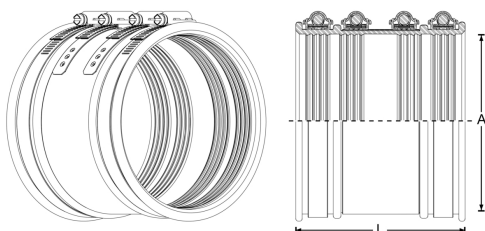

### Dimensioning

A   Size range	150-165 mm
L   Length	102 mm

### Specification

Pressure tightness	0,6 bar
Vacuum tightness	-0,3 bar
Jetting resistance	120 bar
Socket wrench	SW 8 mm
Tightening torque	6,0 Nm
Weight	0.58 kg
Material	EPDM, Stainless steel (AISI 304)

### CE certification

gemäß / according to	EN 681-1, EN 295/4
----------------------	--------------------

### Resistances

Heat resistant	120 °C
Cold resistant	-40 °C
UV resistant	✓
Suitable for soil	✓
Flush-mounting suited	✓

