CRASSUS

be smart. be a Problemlöser.

Product datasheet as a PDF file

# PRODUCT DATA SHEET

## Product view

## Product information

| | |
|---|---|
| Designation | Flexible Branch CFA 050 (40-50, 1 1/2'') |
| Item number | **CRA15070** |

### Product description

Branch with T-angle (90°) for connecting two piping systems with the same pipe dimensions (DN), as well as for the same or different materials and surface structures; suitable for horizontal or vertical installation; suitable for use in plaster, concrete, and soil; UV and weather-resistant material; noise-reducing.

## Technical illustration

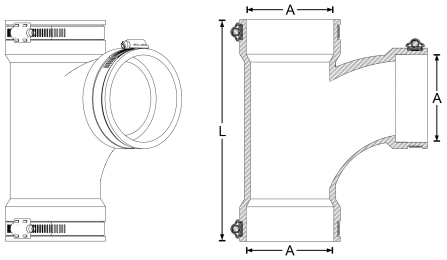


## Dimensioning

| | |
|---|---|
| A \| Size range | 40-50 mm |
| L \| Length | 135 mm |

### Specification

| | |
|---|---|
| Pressure-tightness | 0.6 bar / 8.7 PSI |
| Vacuum pressure tightness | -0,3 bar |
| High-pressure flushing resistance | 120 bar |
| Socket wrench insert | SW 8 mm |
| Tightening torque | 6,0 Nm |
| Product-related standard | EN 681-1 |
| Weight | 0.223 kg |
| Material | EPDM, Stainless steel (AISI 304) |

### Resistances

| | |
|---|---|
| Temperature resistance | -40 / 120 °C |
| UV resistant | ✔ |
| Suitable for soil | ✔ |
| Flush-mounting suited | ✔ |